



RDL®

High Performance Audio Products. Made in America.

RACK-UP® SERIES

Model RU-RN40

Mic/Line to Network Interface 4x0



- Default Configuration Converts Four Mic or Line Inputs to Dante/AES67 Outputs
- 4 X 4 Mixing Matrix Signal Paths and DSP Filters Expand System Design Flexibility
- Ultra-Low Latency: 1 ms Analog to Digital
- XLR or Detachable Terminal Block Provided for Each Input
- Terminal Block Connections may be Wired Balanced or Unbalanced
- Input Gains Adjustable From 0 dB to 60 dB in 3.3 dB steps
- P48 Phantom Individually Selectable per Input or Automatically Gain-Dependent
- Selectable Audio Compressor/Limiter on Each Analog Input
- One DSP Filter for Each Audio Input, Three DSP Filters for Each Dante Output
- Selectable DSP Filters: None, Hi-Pass, Lo-Pass, Shelf Hi/Low, Notch Boost/Cut
- All DSP Filters are Fully Programmable
- Each Output Stage Receives Audio through a Four-Channel Mixer
- Each Output Mixer Source is Adjustable From Unity (Fully On) to OFF
- Provides Functions of Audio Mixer and/or Distribution Amplifier
- Dante/AES67 Outputs are Adjustable in 1 dB Steps 0 to -63 dB then OFF
- Remote Controllable Using Compatible RDL Remote Controls
- Multicolor LED Indication of Audio Levels, Sync and Signal Presence
- Extremely Low Noise < -69 dB Below Operating Level at 60 dB (Max) Input Gain
- Operates at 48 kHz or 96 kHz with High Resolution 24 Bit A/D Conversion
- All Operating Parameters and Settings Programmed using RDL CONSOLE

The RU-RN40 modules are Dante/AES67 audio network interface products compatible with microphones and line-level audio equipment inputs and outputs. These modules are designed to be mounted in equipment racks, closets, conference tables and on shelves or backboards in commercial/industrial installations.

APPLICATION: The RU-RN40 has four analog mic/line inputs and four Dante/AES67 network audio channel outputs. Each output stage is driven by an incorporated mixer fed from all four RU-RN40 inputs. Independent control of all mixer levels plus multiple DSP filters with adjustable parameters make the RU-RN40 far more versatile than a basic format converter. Each DSP filter may be set to None (audio pass-through), High-Pass, Low-Pass, Shelf High/Low or Notch Boost/Cut. Multiple filters may be set to the same function to obtain higher order filtering.

The RU-RN40 factory default settings provide high-quality conversion from four analog line-level, dynamic or condenser microphone sources to four Dante/AES67 network audio channels. The RU-RN40 provides an XLR or a detachable terminal block for connection to each analog input. Normal operating line level is +4 dBu balanced for -18 dBFS. The balanced terminal blocks may be wired unbalanced.



RDL[®]

High Performance Audio Products. Made in America.

RACK-UP[®] SERIES

Model RU-RN40

Mic/Line to Dante Network Interface 4x0

Mic or Line Level to Network Interface Settings (Factory Default)

The RU-RN40 receives four analog audio sources on rear-panel connectors. The inputs default to line level with phantom voltage off and the compressor/limiter disabled. Each channel passes unaltered through a DSP FILTER (set to NONE), then through the four mixers associated with audio OUTPUT 1 DANTE/AES67, OUTPUT 2 DANTE/AES67, OUTPUT 3 DANTE/AES67 and OUTPUT 4 DANTE/AES67. The signals each pass unaltered through three DSP FILTERs (set to NONE) and the OUTPUT ATTENUATOR that may be used as an output volume control.

Customized Settings

RDL CONSOLE network software provides a range of settings allowing the installer or user to reconfigure the RU-RN40.

Connection of microphones to the AUDIO INPUTs may require P48 phantom voltage to be enabled, the PREAMP gain increased by as much as 60 dB, enabling the COMPRESSOR/LIMITER and setting the associated DSP FILTER as a High-Pass and defining its cutoff frequency.

Default settings, with only one mixer input turned up, effectively use the MIXER level adjustments to route audio. Turning up two or more mixer inputs can send a mix to the associated output. A common use would produce a mono sum from a stereo source.

Three programmable DSP FILTERs may be enabled and configured to adjust output equalization.

Consult the RU-RN40 functional block diagram to explore the wide range of configurations made possible by the mixing matrix design.

Common Characteristics

The RU-RN40 can be powered from PoE (Power over Ethernet) or an external 24 V DC power supply, available separately. User volume level adjustment may be provided using compatible RDL remote controls, available separately.

The RU-RN40's superior performance specifications make it ideally suited to the most demanding installations, and an exceptional value in commercial networked audio systems.

The RU-RN40 is constructed in a durable, professional all-metal enclosure suitable for free-standing, surface-mounted or rack-mounted operation. This full-featured product is engineered and manufactured in the U.S.A. for continuous duty in demanding installations. Built to last. Built to outperform.




RDL®

High Performance Audio Products. Made in America.

RACK-UP® SERIES

Model RU-RN40

Mic/Line to Dante Network Interface 4x0

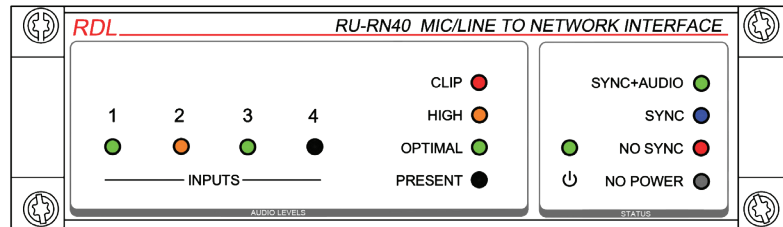

ANALOG AUDIO LEVELS

Analog LED thresholds (4ms refresh rate)

< -61	dBFS	OFF
-60 to -23	dBFS	WHITE
-24 to -11	dBFS	GREEN
-12 to -1	dBFS	ORANGE
-1 to 0	dBFS	RED

All operating functions and parameters of the unit are set using RDL Console software version 3.0 or newer.


DEVICE STATUS

SYNC+AUDIO = (GREEN) when ANY DANTE / AES67 traffic is present.

SYNC = (BLUE) when device is synchronized to the network PTP leader.

NO SYNC = (RED) when device is not synchronized to the network PTP leader.

NO POWER = (OFF) when unit is not receiving valid power from either PoE or a locally connected 24 Vdc power supply.

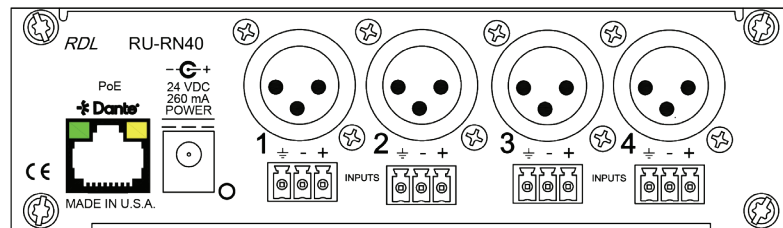


■ = Data Activity
■ = 100 Mbps (Must be illuminated)


Connect optional 24 VDC Power Supply if unit is not to be PoE powered.

NETWORK CONNECTION

The analog audio connections can be made using EITHER the XLR or terminal block for each input.

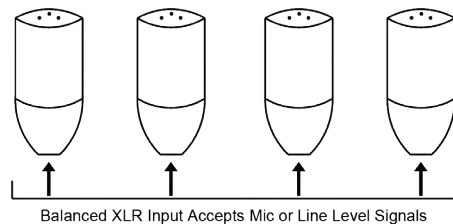

AUDIO INPUTS



Safety Instructions/Consignes de sécurité/
Instrucciones de seguridad/Sicherheitshinweise:



EU Importer:
Importateur de l'UE:
Importador de la UE:
EU-Importeur:

RDL Europe B.V.
Joan Muyskenweg 124
1114 AN Amsterdam

**For Software and Programming
Information See Product Page at
rdlnet.com**

Radio Design Labs Technical Support Centers

U.S.A. (800) 933-1780, (928) 778-3554 - Europe [NH Amsterdam-Duivendrecht] (+ +31) 20-6238 983




RDL®

High Performance Audio Products. Made in America.

RU-RN40 Mic/Line to Dante Network Interface 4x0

Functional Block Diagram

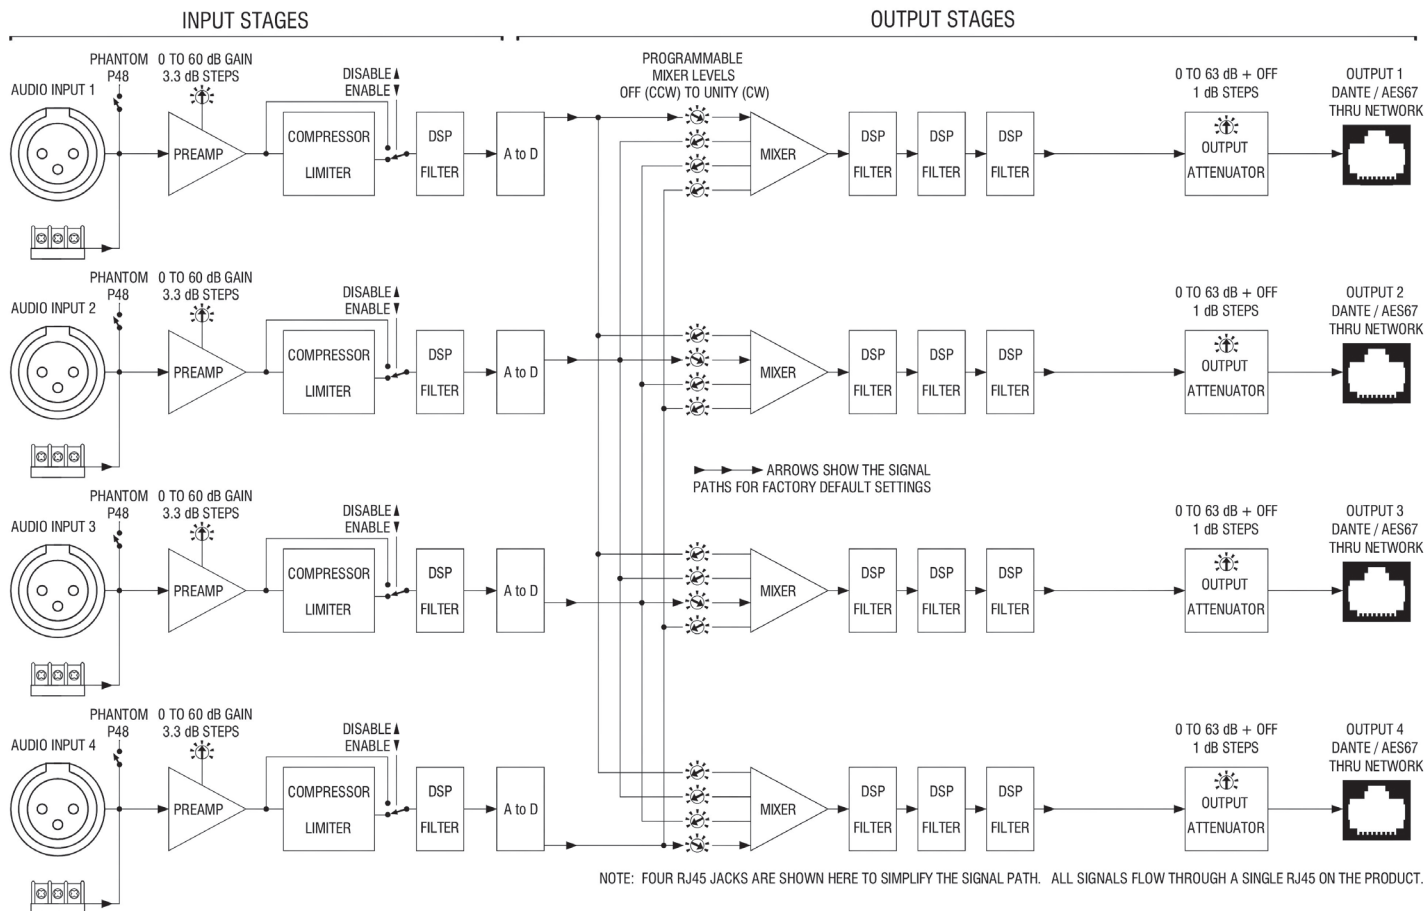

RDL

RU-RN40 MIC/LINE TO NETWORK INTERFACE
REV A



RDL[®]

High Performance Audio Products. Made in America.

RACK-UP[®] SERIES Model RU-RN40

Mic/Line to Dante Network Interface 4x0

Installation/Operation



Declaration of Conformity available from rdlnet.com.
Sole EMC specifications provided on product package.
Specifications are subject to change without notice.

TYPICAL PERFORMANCE

Network Connector:	RJ45 with Link and Speed indicators
Digital Audio Ethernet Protocol:	Dante or AES67
Transmission Rate:	100 Mbps
Sample Rates Supported:	44.1 kHz, 48 kHz (default), 88.2 kHz, 96 kHz
Bit Depth Supported:	24 bits
Audio Operating Level:	-18 dBFS = +4 dBu
Reference Level:	0 dBFS = +22 dBu
Inputs (4):	Balanced, XLR (female) or Detachable Terminal Block (may be wired unbalanced)
Gain:	Software adjustable, 0 dB to 60 dB, 3.33 dB steps
Input Level (for +4 dBu/-18 dBFS):	-56 dBu minimum, +4 dBu , maximum
Input Level (maximum):	+22 dBu
Input Impedance:	> 1.2 k Ω
Phantom Power:	P48, software-selectable; programmable for automatic enable when MIC gain is selected
Standard for Phantom:	IEC 61938:2013
Frequency Response:	20 Hz to 20 kHz (+0, -0.75 dB)
Equivalent Input Noise (EIN):	< -129 dBu (60 dB gain); < -131 dBu A-Weighted
Noise below -18 dBFS (20 to 20 kHz):	Mic: < -69 dB (60 dB gain), < -79 dB (50 dB gain); Line: < -100 dB
THD+N:	< 0.05% (20 Hz to 20 kHz, +4 dBu/-18 dBFS)
CMRR:	Below Noise Floor (50 Hz to 150 Hz)
Crosstalk:	< -70 dB (20 Hz to 20 kHz, any channel to any channel, 0 dB gain to 60 dB gain)
Indicators (7):	Ethernet Link and Speed (2, rear panel); Signal per audio channel and Power (5, front panel)
Ambient Operating Environment:	0° C to 40° C
Power Requirement:	PoE Class 0, IEEE 802.3af, or 24 Vdc @ 260 mA (6.2 W)
Specification Conditions:	Gain/Level $\pm$ 1 dB; Source termination 150 Ω
Dimensions:	5.74" (14.58 cm) W; 1.64" (4.17 cm) H; 6.4" (16.26 cm) D
Package Type:	Cardboard Box
Package Dimensions:	3.25" (8.26 cm) H X 7.8" (19.8 cm) W X 7.25" (18.4 cm) D
Shipping Weight:	2.17 lbs. (0.98 kg)
WEEE weight:	1.8 lbs. (0.82 kg)