

Overview:

The MuxLab "MuxStream Pro Single-Camera Live Streaming Kit" (model 500786) includes the main components needed to broadcast live content to mass recipients spread out across the globe. The solution allows live presentations to effectively be streamed over the Internet at up to 4K and can work with industry standard broadcast streaming services such as YouTube, Facebook, Wowza, to name a few, and also works with popular Audio/Video content production software tools such as OBS, Wirecast, and others.

The kit comes complete with an AV over IP H.264/H.265 4K Transmitter to stream content to Broadcasting Services, an HDMI/IP PTZ camera @ 1080p/60, a wireless Lav Mic system, an intuitive Control App to manage the system, and a 6.6ft (2m) Premium Certified HDMI 2.0 cable

The MuxLab MuxStream Control App is free to download, available for iOS and Android tablets, and Windows PC. The Control App manages the system setup, configures the Transmitter to stream to various broadcast services such as YouTube, Facebook, and Wowza, and manages camera settings (such as PTZ). The AV over IP H.264/H.265 4K Transmitter supports up to 4K video @ 30Hz and may be located up to 330ft (100m) from an Ethernet network switch and supports PoE (but a PSU is included) and supports low bandwidth for streaming AV content over the Internet.

Applications:

- Live AV presentation broadcasts over the Internet
- Live AV streaming to YouTube, Facebook and Wowza
- Streaming to OBS and Wirecast AV content production tools
- Ideal for House of Worship, Fitness Training, Cooking Classes, etc.







Key Features:


- AV over IP Transmitter supports up to 4K @ 30Hz (4:4:4) video streams
- Low bandwidth streaming via an H.264/265 video codec, excellent for LAN & Internet transmission
- High image quality and <200ms latency in low latency mode with H.265
- Supports Multicast, RTSP, RTMP, HLS, FLV and TS
- Includes an HDMI/IP Camera @ 1080p/60
- Includes wireless clip-on Lav (Lavalier) Mic with transmitter and receiver
- AV over IP Transmitter includes PSU, but may be PoE powered
- Managed via free to download MuxLab MuxStream Control App, available for iOS and Android tablets, and Windows PC



Constitutions	
Specifications	
Environment	HDMI 1.4
Signals	HDMI 1.4 and HDCP 1.4
Video Bandwidth	300MHz
Network Bandwidth	Up to 40Mbps (max)
Latency	<200ms (in low latency mode with H.265)
Protocols	Multicast, RTSP, RTMP (H.264), HLS, FLV (H.264) & TS
Camera	12x Optical Zoom Camera @ 1080/p60, with remote PTZ control
	Accessories: Wall Mount Bracket
Maximum Distance (Ethernet Signal)	Cat5e/6: 330ft (100m) from Ethernet Switch. Unlimited over the Internet
	Note: When installed in an electrically noisy environment, an STP cable must be used. Also, cross-connection
	reduces the effective distance depending on the grade of twisted cable used.
Ethernet RJ45 Pin Configuration	RJ45 Link Pag Page Tang Page 1 Page Page 1 P
D	Pin 1 (R) Pin 2 (T) <u> </u>
Reverse Polarity Sensitive. Use EIA/TIA	Pin 3 (R) Pin 6 (T)
568A or 586B straight-through wiring.	Pin 4 (R) Pin 5 (T)
D	Pin 7 (R) Pin 8 (T)
Power Source	The devices come with a power source where applicable. The 4K H.264/H.265 Transmitter also supports PoE (PD)
PoE	and may be powered via a PoE (PSE) Ethernet Switch. IEEE 802.3af
• • •	1
Temperature	Operating: 0° to 40°C Storage: -20° to 85°C
Carton Box Dimensions	Humidity: Up to 95% non-condensing
	12.0" x 12.0" x 10.0" (30.0 x 30.0 x 25.0 cm)
Compliance	Regulatory: FCC, CE, RoHS Flammability: 94V0
Warranty	2 years
Order Information	500786 MuxStream Pro Single-Camera Live Streaming Kit (UPC: 627699007860)



Typical Application

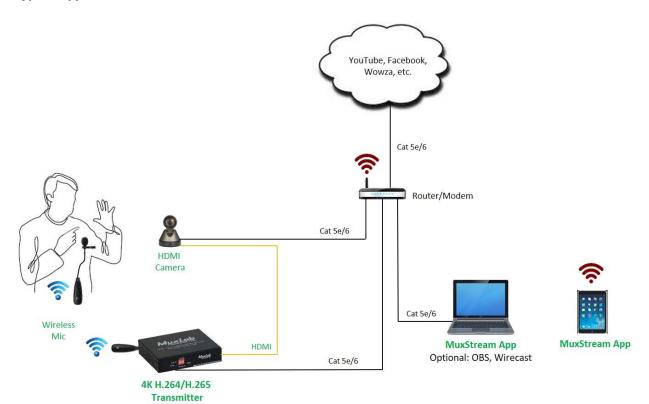











© MuxLab Inc. 2021

MuxStream Pro Single-Camera Live Streaming Kit

MuxLab Inc.

2321 Rue Cohen, Montreal, Quebec, Canada, H4R 2N7

Tel: (514) 905 0588 Fax: (514) 905 0589

Toll Free:1 877 689-5228 E-mail: info@muxlab.com www.muxlab.com