

## Mini40II

### Bluetooth Power Amplifier



#### Description

This is a wall mount bluetooth amplifier with small size, it has 1 Aux input and 1 Aux output for power extension, it support 8Ω speaker output, the dimension is very small with 130×123×42mm, it have very clearly sound experience. The device can meet the requirements of the users and can be widely applied in classroom, stores, Coffee shop and other small place.

#### Features

- Built-in 2x20W stereo Class D amplifier
- 8 ohms speaker output
- Support wireless Bluetooth 5.0+EDR
- 1 AUX input and 1 AUX output for power extension
- Aluminum-alloy casing, small size and portable
- Power supply: AC110-230V/50Hz/60Hz
- With hooks at the bottom for wall mount installation

#### Specifications

Model	Mini40II
Rated Power	2×20W/8Ω
Freq. Resp.	20Hz-20KHz
Distortion	<0.3%
SNR	>82dB
Matched Impedance	8Ω
LINE IN Sensitivity	1V
LINE IN Impedance	>10KΩ
BT Transmission	10m
BT Standard	BT5.0+EDR
Power Supply	AC110-230V/50Hz/60Hz
Net Weight	0.53KG
Gross Weight	0.7KG


Product Dimension

150mm × 124mm × 42mm

Package Dimension

300mm × 155mm × 80mm


## Front / Rear Panel

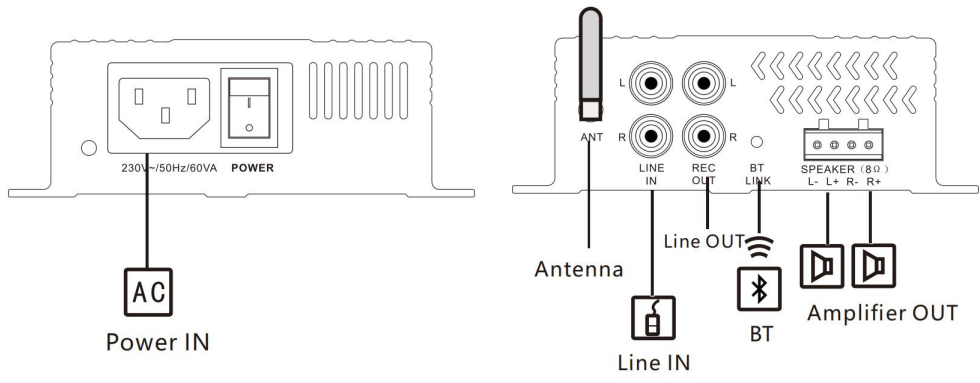

### Product Information

#### Method 1: Horizontal Installation

- 4 screws are installed in the needed place. (As shown below)

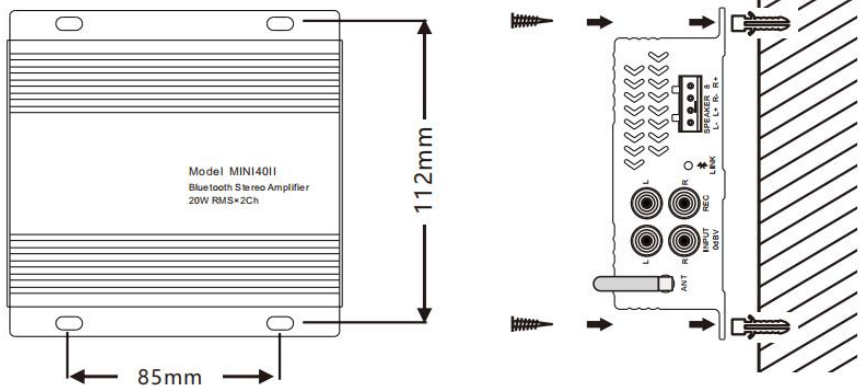

#### Method 2: Vertical Installation

- 4 screws are installed in the needed place. (As shown below)
- Connect lines of power input and amplifier output.
- Connect the input lines as needed or connect the Bluetooth via an electronic device.
- Finally, check the installation is secure.

