



GENERAL


Single channel mode	150 W @ 2 Ω	150 W @ 4 Ω	150 W @ 8 Ω
Maximum power-sharing capacity per channel		400 W @ 4 Ω	600 W @ 8 Ω
Max output voltage / current			
Maximum unclipped output voltage			142 V _{peak}
Maximum output current			15.6 A _{peak}

AC MAIN POWER

Power supply	Universal, regulated switch mode with PFC (Power Factor Correction)		
Nominal power requirement	100-240 V ±10%, 50-60 Hz		
Operating voltage	90 V – 264 V		
Power consumption/current draw			
Idle	115 V: 16 W – 0.275 A	230 V: 17 W – 0.21 A	
1/8 of max output power @ 4 Ω	115 V: 130 W – 1.17 A	230 V: 129 W – 0.67 A	

THERMAL

Thermal dissipation			
Idle	115 V: 53 BTU/h	230 V: 59 BTU/h	
1/8 of max output power @ 4 Ω	115 V: 126 BTU/h	230 V: 139 BTU/h	

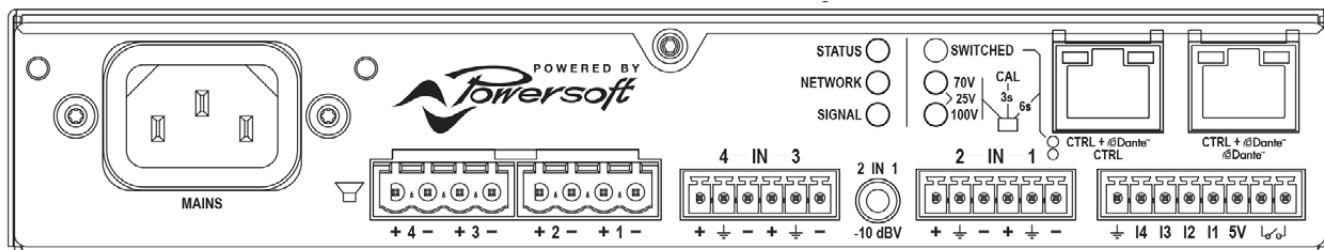

Channel Handling	
Number of output channels	4 (Euro 5 mm)
Dante/AES67 output channels	4
Balanced inputs channels	
Balanced inputs channels	4 (Euro 3.8 mm)
Unbalanced inputs channels	2 (stereo mini-jack) In parallel with input 1 & 2
Dante/AES67 input channels	4 - max 2 flows
Audio	
Gain	17 dB - 47 dB (0.1 dB increments)
S/N (20 Hz - 20 kHz @ 8 Ω) analog input	>102 dB
Input sensitivity	4 dBu (balanced) -10 dBV (unbalanced)
Max input level	18 dBu / 6.16 VRMS
Frequency Response @ 8 Ω	20Hz – 20kHz +/-0.5 dB
Crosstalk (1 kHz)	-60dB
Input impedance	10KΩ to GND / 20kΩ balanced
CMRR (Typ.)	60 dB
DSP	
AD converters	24 Bit @ 48 kHz 125 dB-A Dynamic Range - 0.00x % THD+N
DA converters	24 Bit @ 48 kHz 115 dB-A Dynamic Range - 0.00x % THD+N
Internal precision	32 bit floating point
Wake up time (from sleep)	2 s
Latency	2.5 ms fixed latency architecture
Delay	100ms (per output) for time alignment
Equalizer	Parametric IIR: peaking, hi/lo-shelving, all-pass, band-pass, band-stop
Crossover	Butterworth, Linkwitz-Riley, Bessel: 6 dB/oct to 24 dB/oct (IIR)
High pass filter	A 12 dB Butterworth high pass is automatically set based on the impedance response in the auto setup
Limiters	RMS voltage, Peak limiter
Load monitoring	Triggered impedance sweep, average impedance and pilot tone monitoring

Cooling & fan noise	
	Forced cooled - Front to back
Average output power capacity with fans not moving	4 W
Whisper mode	8 W (26 dBA)
Max power	41 dBA
Networking	
Network	2 x RJ45 Fast Ethernet
Network modes	Switched: Both ports connected with an integrated switch. Supports forwarding of gigabit traffic. Split: One port for control/monitoring, 1 port for audio
Construction	
Dimensions	210 x 275 x 40 mm
Weight	2.6 kg
CERTIFICATIONS - A&E SPECIFICATIONS - USER GUIDES - SOFTWARE	
Powersoft site Mezzo products	www.powersoft.com