



TECHNICAL DATASHEET



The RX260A is a 360° omnidirectional acoustic device featuring multi-mode audio inputs, supporting functions such as broadcasting, bird repelling using sound waves, and public notifications. With a notification coverage area of 1.25 km², it is ideal for installation in small to medium-sized areas. Equipped with a TCP/IP network interface, the device enables remote control and management, meeting requirements for mass notification, public safety applications, and platform integration.

Features


- 360° uniform coverage
- 1 to 24 cells configuration
- Live-voice message/build-in warning tone/mp3
- TCP/IP or local control unit
- Easy operation/maintenance
- Aluminium alloy
- All-weather use
- IP65

Acoustic Specifications

Parameter	Details
Peak SPL@1m	137dBA
Continuous SPL@1m	131dBA
Continuous SPL@30m	101dBA
Notification Radius	630m
Notification Area	1.25km ²
Frequency Response	250Hz~7000Hz

Mechanical Specifications

Parameter	Details
Dimension(D*H)	700mm*400mm
Weight	25kg
IP Rating	IP65

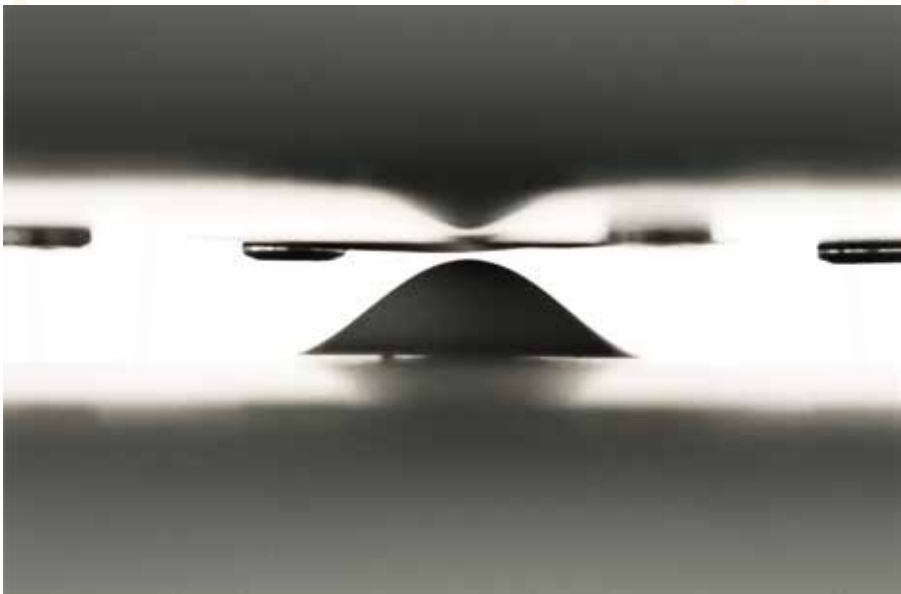


Electrical Specifications

Parameter	Details
Rated Power	400W
Operating Voltage	110V~260V AC
Communication Method	TCP/IP

Environmental Specifications

Parameter	Details
Hot Operating Temp	MIL-STD-810H, 501.7 High Temperature,Procedure II,Design type Hot, 50°C
Cold Operating Temp	MIL-STD-810H, 502.7 Low Pressure, Procedure II,Design type Basic Cold, -40°C
Hot Storage Temp	MIL-STD-810H, 501.7 High Temperature,Procedure I,60°C
Cold Storage Temp	MIL-STD-810H, 502.7 Low Pressure, Procedure I,-50°C
Operating Humidity	MIL-STD-810H, 507.6 Humidity,Procedure II - Aggravated
Rain	MIL-STD-810H, 506.6 Rain,Procedure I - Rain and Blowing Rain

OPTIONAL ACCESSORIES

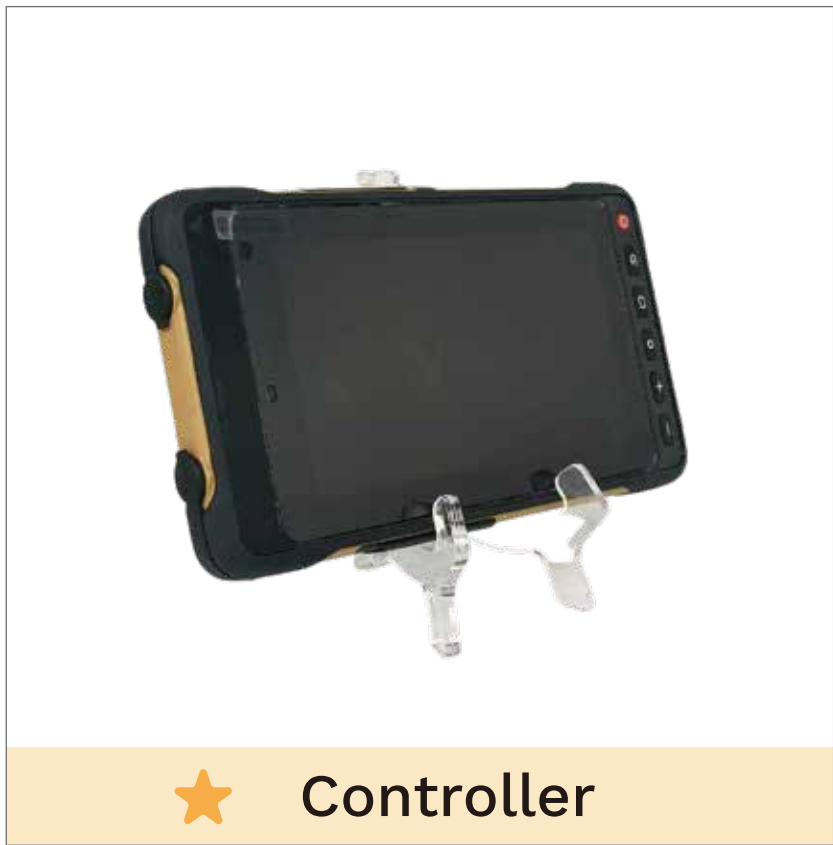

Beijing Ribri Technology Co., Ltd.



Add: 1802, 18th Floor, Building 3, No.8 Chama Street, Xicheng District, Beijing

Email: market@ribri.com

Whatsapp: +86 13911896601

Website: www.ribri.com