

#### Concentrating on audio since 1988

### PA System CD/MP3 Player with Radio (3 MP9807C Audio Sources in One)



## **F**eatures

- Built-in CD player, MP3, tuner & remote control  $\triangleright$
- ≻ USB & SD inputs on front panel for MP3 player
- $\triangleright$ AM/FM tuner each memory of 98 PA system
- $\triangleright$ VFD screens to display in English CD/MP3 and tuner separated
- Eject, play, stop, play mode, prev, next, USB/SD & mute functional buttons for CD/MP3 player
- $\triangleright$ AM/FM, ST/MON, MEO, Auto/Manual, Up, down & 1-6 number buttons for tuner
- $\triangleright$ Remote control over music selection and volume control and timer
- ⊳ Digital pa system source player, background music system source playerMP3 and tuner separated

 $\triangleright$ 

# **Description**

 $\triangleright$ This CD Player are designed for commercial and industrial public address applications. Built-in CD player, MP3, tuner & remote control;USB & SD inputs on front panel for MP3 player;AM/FM tuner each memory of 98 PA system;VFD screens to display in English CD/MP3 and tuner separated; Eject, play, stop, play mode, prev, next, USB/SD & mute functional buttons for CD/MP3 player;AM/FM, ST/MON, MEO, Auto/Manual, Up, down & 1-6 number buttons for tuner;Remote control over music selection and volume control and timer;Digital pa system source player, background music system source playerMP3 and tuner separated

## **S**pecification

Frequency response	20Hz-20kHz(±3dB)
Signal to Noise Ratio	90dB
Dynamic range	90dB
THD	0.005%
Wow & Flutter	Under the limited level
Output level	0dBV
Protection	AC fuse
Power Requirement	AC220-240V/50-60Hz
Outer Packing Size (mm)	(L×W×H) 530×440×195
Unit Size (mm)	(L×W×H) 484×365×88
Gross weight	8.7kg
Net weight	6.9kg


#### Professional Audio Manufacturer



Guangzhou DSPPA Audio Co., Ltd

Concentrating on audio since 1988




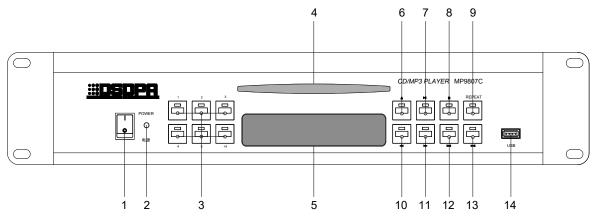

- 1 Power switch(1 is power on and the "power LED" is on )
- 2 Power indicator
- 3 1 to +5 keys
- 4 Disc door
- 5 Display screen
- 6 Open keys
- 7 Play/pause keys

## **Real Panel**

- 8 Stop keys
- 9 Repeat keys
- 10 Search up keys
- 11 Search down keys
- 12 Skip up keys
- 13 Skip down keys
- 14 USB jack

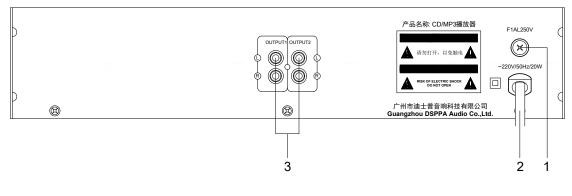

- 1 AC power cord 3 Output jack
- 2 AC fuse

Notice: DVD part of the machine can only output audio signal and has not video frequency broadcasting function.