

LRAS1515AI

150W Active Long Range Acoustic Hailing Speaker System with Howling Suppression



Description

The LRAS1515AI Active Long Range Acoustic Hailing Speaker System is portable and delivers high sound pressure, highly directional, high-definition audio. Within the system, the LRAS1515PII Acoustic Hailing Player is equipped with a built-in full-digital AI anti-feedback module that effectively eliminates microphone feedback, ensuring clear and stable sound output.

The system is suitable for a wide range of applications, including military operations (anti-terrorism, explosion-proof tasks, border and coastal defense, marine surveillance, sentry posts), public security (crowd control, safety and stability maintenance), public safety (joint defense, fire protection, safety supervision, bird dispersal at airports), emergency response (rescue operations, meteorological and geological early warning), and public address (squares, wharfs, factories, and large-scale projects).

The system consists of the LRAS1515PII Acoustic Hailing Player, LRAS1515S Active Directional Long Range Acoustic Hailing Speaker, and LRAS1515M Handheld Microphone.


Features

- All-weather design, the shell made of high-strength industrial technology has super weather resistance;
- Has good directing control ability, and there will be no directivity changes with the increase of frequency;
- The effective distance at which acoustic hailing can up to 250m;
- The sound transmission distance can reach 700 meters and 80dB with clear sound (tested in a controlled experimental environment);
- Handheld and portable, it supports vehicle DC26V-28V power supply, built-in DC24V lithium battery, and the battery duration up to 1 hour; please keep the charging voltage at DC27V-30V;
- Acoustic hailing player with digital display, support USB interface, Bluetooth, MP3 playback
- Acoustic hailing player with a built-in full-digital AI anti-feedback module that effectively eliminates microphone feedback, ensuring clear and stable sound output.
- Waterproof level IP65, designed with waterproof structure.

Specifications


Model	LRAS1515AI	
Active Long Range Directional Acoustic Hailing Device	Rated Power	150W
	DC Input Voltage	DC27V-30V
	Signal Input Voltage	2000±200mV
	Frequency Response	340Hz-6kHz
	Max. SPL (1 m)	136±2dB
	Sound Beam Angle	±15° (@2.5kHz)
	Waterproof Level	IP65
	Package Dimension (Flight Case)	490×420×340mm
	Dimension	365×373×217mm
	Gross Weight	21kg
	One-handed Mic Net Weight	0.3kg
Acoustic Hailing Player	Acoustic Hailing Device Net Weight	7.8kg
	Input Sensitivity (MIC)	10±2mV
	Input Sensitivity (AUX)	300±50mV
	Input Sensitivity (USB)	-10dB
	Input Sensitivity (Bluetooth)	-10dB
	Balanced Audio Output	2000±200mV
	Frequency Response (AUX)	340Hz-8kHz (±3dB)
	Frequency Response (MIC)	340Hz-8kHz (±3dB)
	Distortion	≤1%
	Audio Format	MP3, WAV
	Power Supply	DC12V/1A
	Player Dimension	160×122×55mm
	Player Net Weight	0.43kg

Active Long Range Directional Acoustic Hailing Speaker

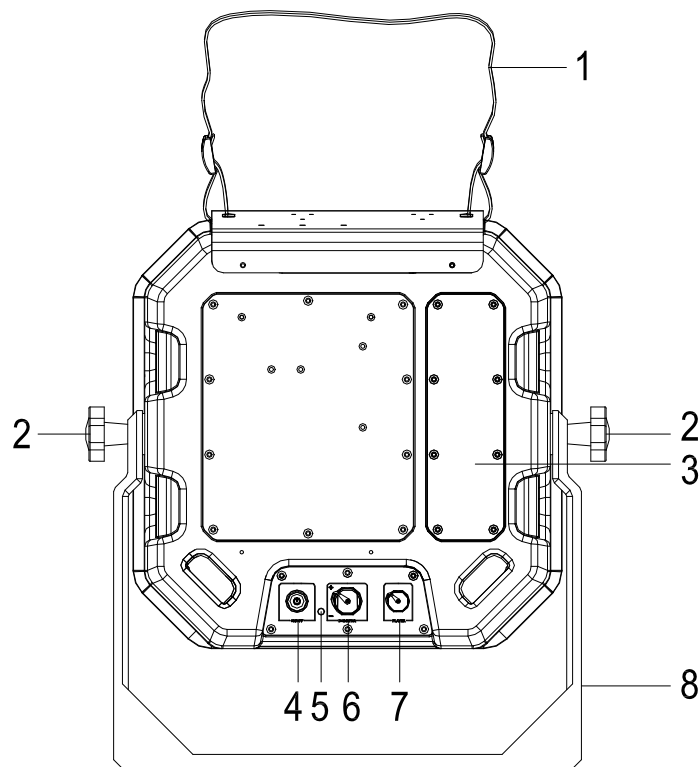


1. Adjustable handle rope
2. Hexagonal plum flower head plastic machine screw
Used to fix the vehicle mounting bracket.
3. Sealed battery compartment
4. Waterproof self-resetting power soft-switching
Press the power switch to turn on the power, press and hold the power switch again to turn off the power.
5. Charging Indicator Light
Connect to DC power supply to charge the battery, the indicator light is off when fully charged, it takes about 4 hours to charge 90%, and about 5.5 hours to fully charge.
6. DC24V/15A power supply
Connect the power adapter to power the case, and also charge the battery.
Note: The normal working voltage of the case is DC24V, because the case has a built-in DC24V lithium battery and the charging voltage is DC25.2V, if you want to fully charge the battery, it is necessary to access DC27V – 30V DC power supply!
7. Acoustic Hailing Device (Connect Acoustic Hailing Device Chassis Wiring Port, Point 13 of Acoustic Hailing Player)
8. Vehicle-mounted fixed bracket

Acoustic Hailing Player

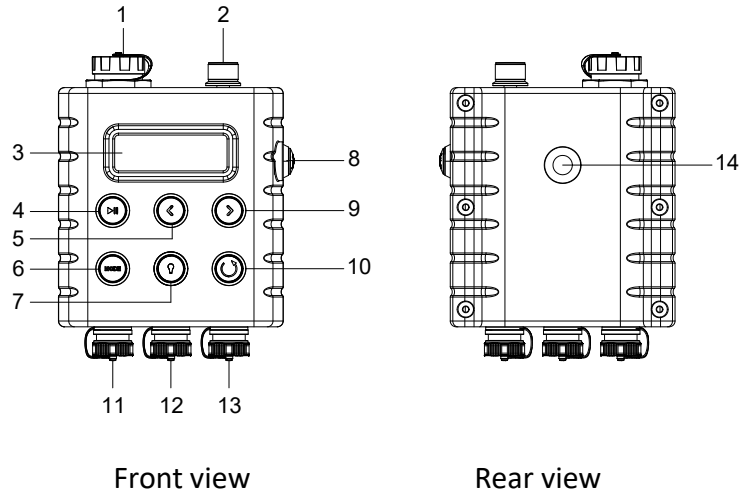

1. USB Interface
Support USB2.0, USB flash drive with a capacity of 32G or less, good compatibility.
2. Volume Knob
Rotate the volume clockwise to increase, and rotate counterclockwise to decrease the volume.
3. Display screen
Display mode, playback status and working status indication.
Note: when AMP PORTECT ! is displayed, it indicates DC or short circuit protection.
4. Play/Pause Button
It refers to pause playback in the USB playback mode and Bluetooth mode.
5. Previous Song
In USB disk and Bluetooth playback mode, short press to switch to the previous song, and long press to decrease the volume.
6. Mode Switch Button
Press this button to switch between USB disk playback mode, line input mode (AUX) and Bluetooth playback mode (BLUE) in turn.
7. Button/screen backlight switch
When used at night, press the button to turn on the button/ screen backlight, the button light is displayed in green constantly, press it again to turn off the backlight.
8. Play dispersion sound button
One button triggers the dispersion signal, and pressing it again will stop triggering. This source has the highest priority.
9. Next Song
In USB disk and Bluetooth playback mode, short press to switch to the next song, and long press to increase the volume.
10. Playback Mode Switch Button
In the USB disk and Bluetooth playback modes, the playback modes are: all loop (ALL), random play (RAN), and single loop (ONE).
11. Handheld Microphone Interface
12. Line Input Port
The label 1 is the ground terminal, the label 2 is the R input, and the label 3 is the L input.
13. Acoustic Hailing Device Chassis Wiring Port
Using 7-pin shielded cable to connect acoustic hailing device.
14. Mounting Bracket
Installed or suspended in the Acoustic Hailing Device Chassis.

Handheld Microphone

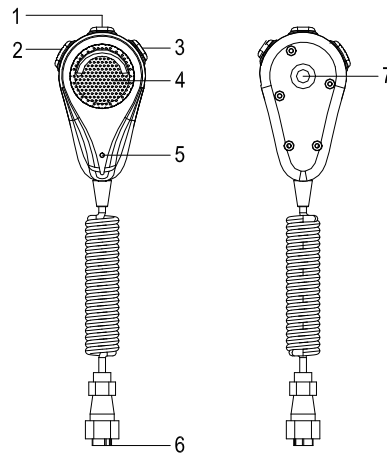

1. REC Record Button

Before recording, insert a USB flash drive, and then press and hold the PTT + REC button for about 3 seconds to start recording. Press and hold the PTT+REC button for 3 seconds and release them to exit recording. (For optimal recording quality, turn the volume potentiometer to the minimum when recording, and adjust the volume to the desired level after recording.)

2. PTT Black Microphone Button

Press and hold the PTT button to activate the speaking function, and release the PTT button to exit the speaking function.

3. PLAY Button for Playing Recording

Press the PLAY button once to enter the recording playback function, starting with the latest recording; press it again to exit the recording playback.

4. Microphone Pickup Window

5. Recording Indicator Light

The indicator LED will blink once when recording the voice or audio reappearance.


6. Microphone Plug (Connect Handheld Microphone Interface, Point 11 of Acoustic Hailing Player)


7. Mounting Bracket

Installed or suspended in the Acoustic Hailing Device Chassis.

Installation Description

When in use, the handheld microphone and the acoustic hailing player can be hung on the top, back or both sides of the case;

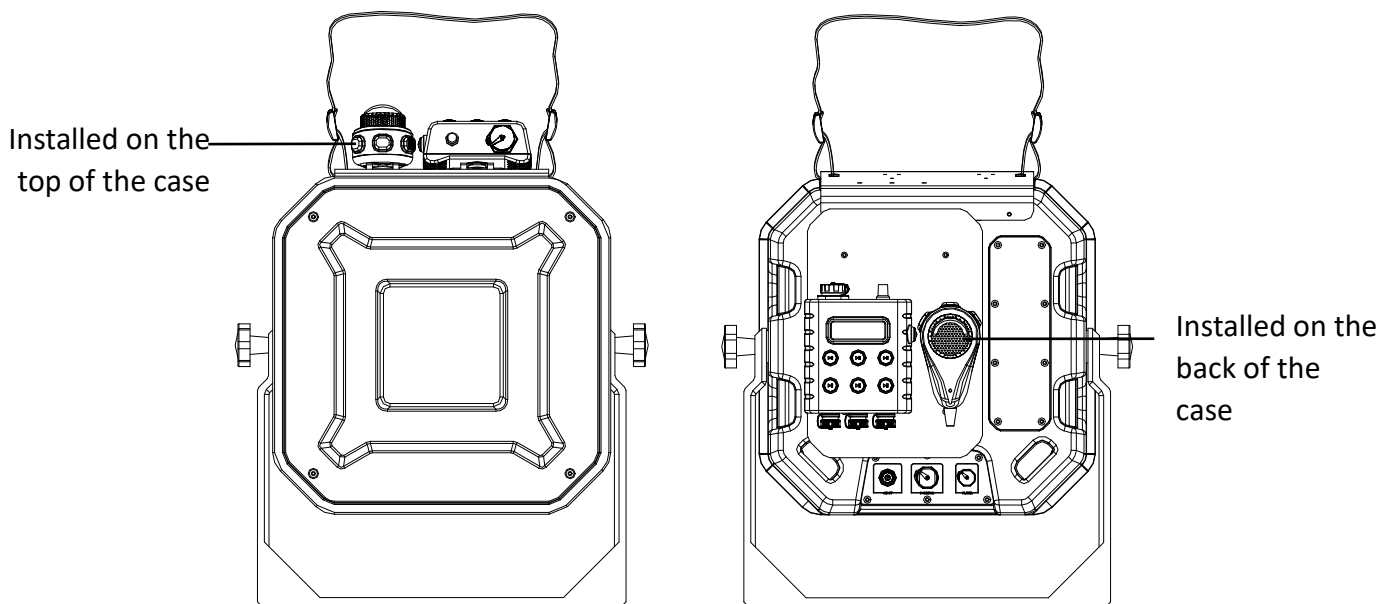

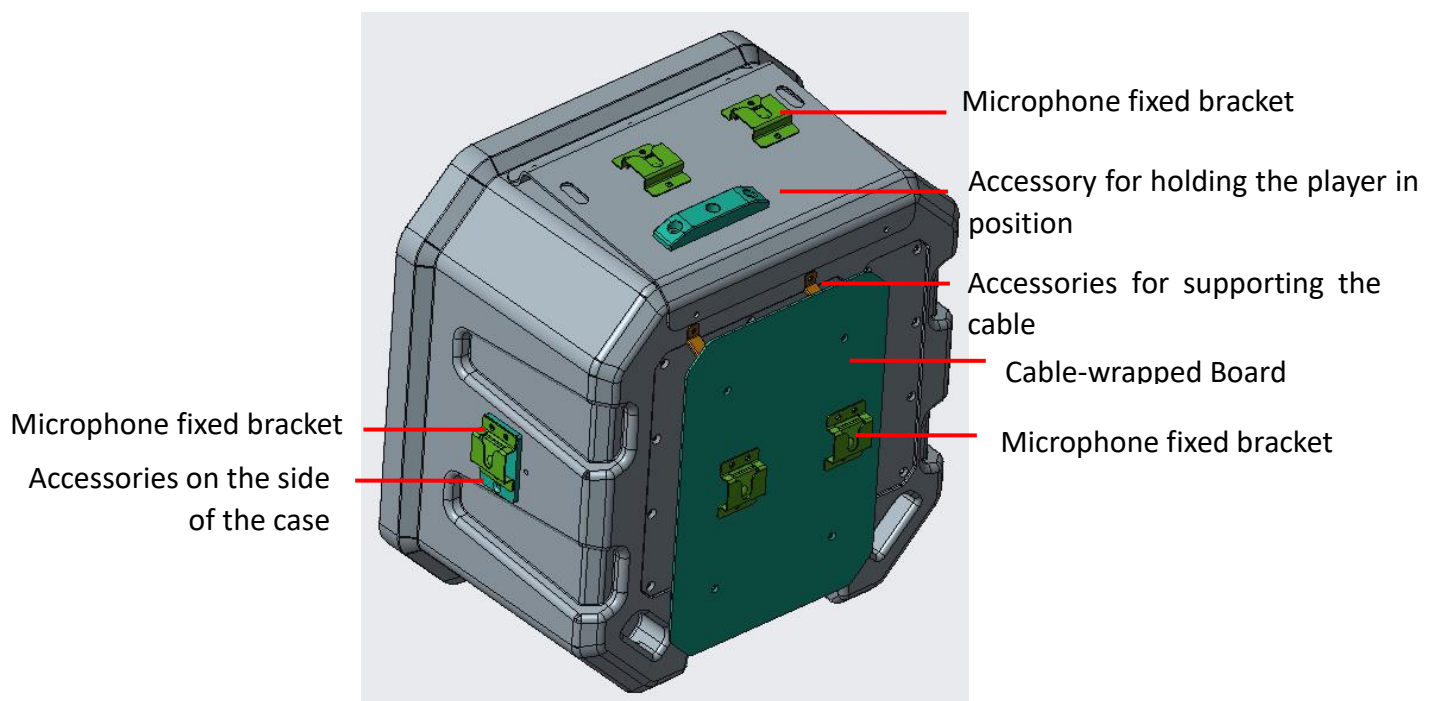

The angle range is 0-60°, and each gear is increased by 15 °.

